



A

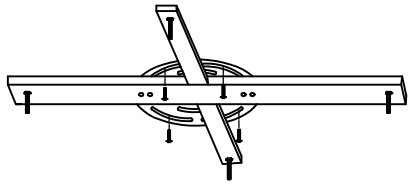

B

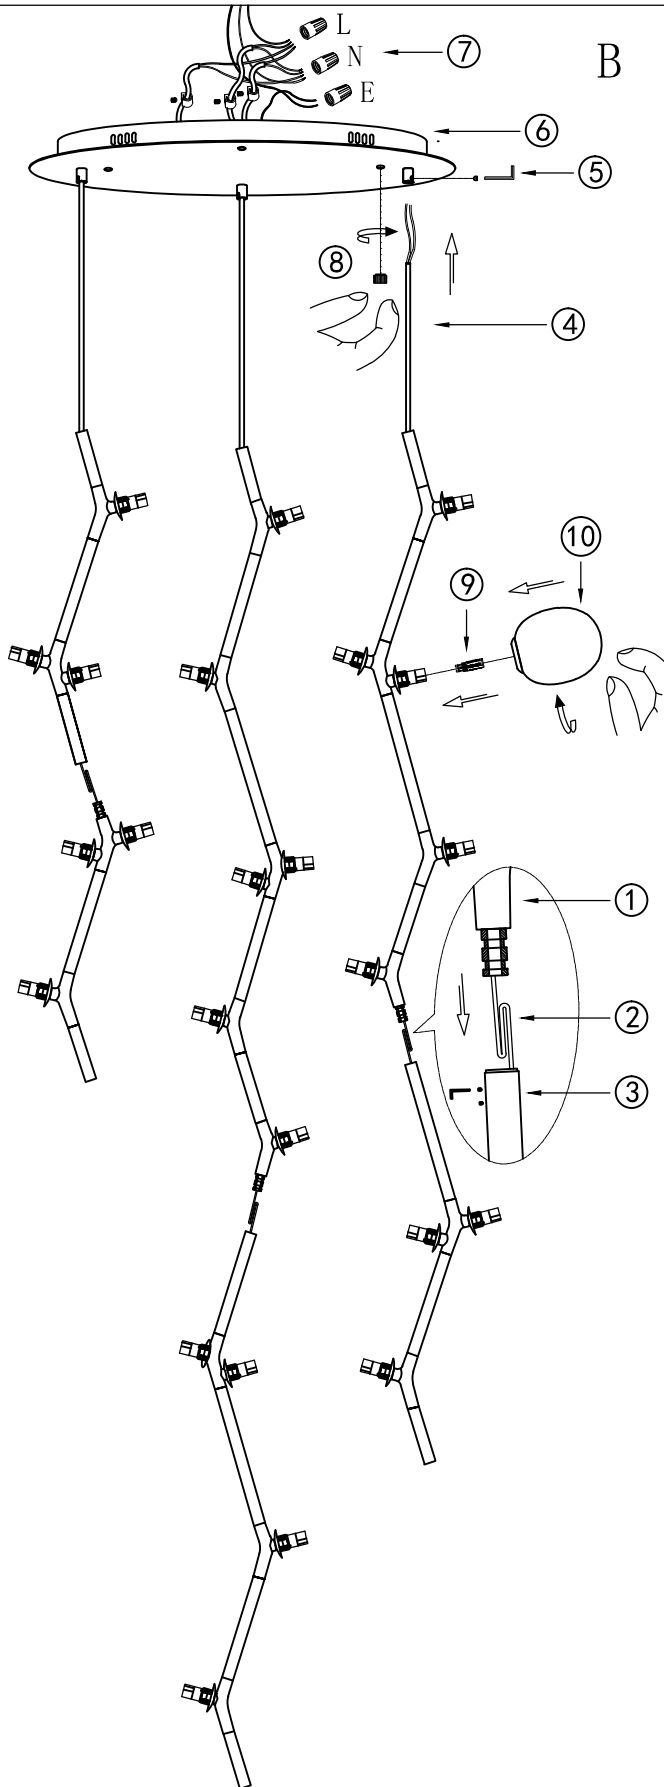

# Instruction sheet

Item NO: HF4824

1. Turn off the power; Please wear gloves before installation;
2. Fix the hanging plate to the ceiling by screw  
(Notice: must be strong)
3. Fold wire 2 into a "Z" shape, then push 2 into 3 by 1 until the lamp fixtures are connected in the place, then fix by set screws;
4. Put wire 4 through the chassis and fix the wire by 5227 lock line, then fix set screws 5 strongly (The wire can be adjusted its height freely)
5. The live line "L" of the lamp main wire 7 is connected to the live line "L" of the power wire; The null line "N" of the lamp main wire is connected to the null line "N" of the power wire; The earth wire "PE" of the lamp main wire is connected to the earth wire "PE" of the power wire; then fix it strongly by wiring cap;
6. Make the hole site of canopy 6 matched the hanging plate and fix it, then twist tightly by 7;
7. Insert the light source 9 into the lamp holder;
8. Finally, twist the glass shade 10 to the lamp body;
9. Replace the damaged power wire immediately, the installation and maintenance must be carried out by professional personnel, please turn off the power when change the bulbs; replace the damaged glass immediately, please clean the lamp regularly, don't wipe the lamp with corrosive substances;
10. Voltage: 110-220V Frequency: 50-60Hz
11. Light source: G9 110V 24\*MAX.LED 3-5W

